

**DA Series H.264 Standalone DVR**  
**4 Channel Duplex (Full Triplex w/network viewing)**

The DA Series is a 4 channel high performance DVR that provides simultaneous recording and playback, along with real-time display, 120/100 fps recording, full & split screen, Quad and 3 PiPs. The DA comes with two hard drive capacity, S-video, CVBS monitor and VGA optional output.



**IPD-4DA 4 Channel**

Resolution: 720 x 480 (NTSC) 720 x 576 (PAL)  
 Compression: H.264  
 Video inputs: 4 Channel  
 Record speed: up to 120 fps (NTSC), 100 fps (PAL)  
 Audio In/Out: 2 x RCA - 1 Channel in & out  
 Alarm Inputs: NC Type





**REGULATORY:**

CE (EN5513, EN50130-4)  
 EU: 73/23/EEC LVD  
 RoHS Compliant

**ACCESSORIES:**

Spare Remote Control  
 Spare USB Mouse

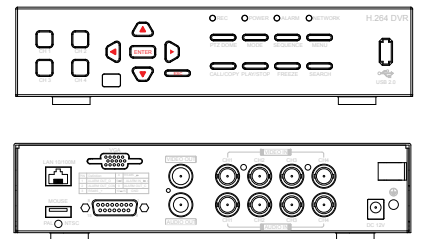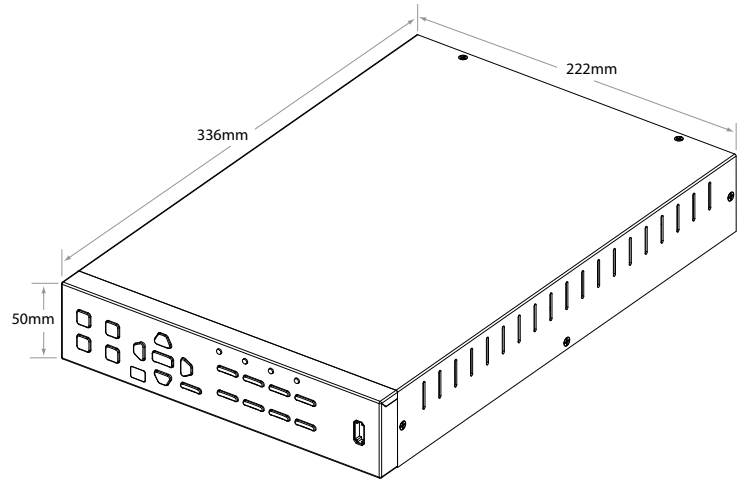

**ORDERING:**

**IPD-4DA** H.264 Four Channel Digital Video Recorder (DVR)

*NOTE: Specify power requirements when ordering: 120vAC 60Hz or 230vAC 50hz.*

Model	IPD-4DA
<b>Video Signal</b>	
Television System	NTSC/PAL
Refresh Rate	NTSC:60 fields/sec / PAL:50 fields/sec
Resolution	NTSC:720x480 ; PAL:720x576
Inputs	4Ch
Inputs Signal	Composite 1.0Vp-p 75ohms
Outputs Signal	Main monitor, VGA, Composite 1.0Vp-p 75ohms
<b>Video Features</b>	
Live (fps)	NTSC:120/PAL:100
Zoom	Digital 2X zoom
Sequence	Sequence display in full size
Display Format	Full screen, Quad split
<b>Audio Features</b>	
Audio In/Out	4Ch input/1Ch output
Compression	G.711
<b>Record</b>	
Recording Speed (IPS)	NTSC:120/PAL:100
Resolution	NTSC: 720x480, 720x240,360x240 PAL:720x576, 720x288,360x288
Compression	H.264
Recording	Motion, Alarm, schedule
<b>Search</b>	
Rec. Search Selection	By Manual, Timer, Motion alarm, Each camera, All cameras
Playback Option	Fast x32,Slow forward, Rewind, Image by image
<b>Backup</b>	
Backup Media	HDD, USB Stick Memory, Network
Backup Option	All cameras, Time range
<b>Network</b>	
Ethernet	Auto sense 10/100mpbs
Protocol	TCP/IP,DHCP,DDNS server
<b>Alarm</b>	
Alarm Inputs	4 Inputs
Alarm Outputs	1 Replay outputs (3A max)
Alarm Latch Up	1~999 sec
Buzzer Out	On/Off
<b>Connectors</b>	
Video Inputs	4 BNC
Monitor Out	1 BNC
Alarm In/Out	D-sub
Ethernet	RJ45
Mouse	PS2/USB
<b>Mechanical</b>	
USB	USB 2.0
<b>Environmental</b>	
Operating Temperature	-5°C ~ 40°C (23°F - 104°F)
Operating Humidity	5% - 95%

## DA Series H.264 Stand-alone DVR

### 4 Channel Duplex (Full Triplex w/network viewing)

#### REGULATORY:

CE (EN5513, EN50130-4)  
EU: 73/23/EEC LVD  
RoHS Compliant

#### ACCESSORIES:

Spare Remote Control  
Spare USB Mouse

