

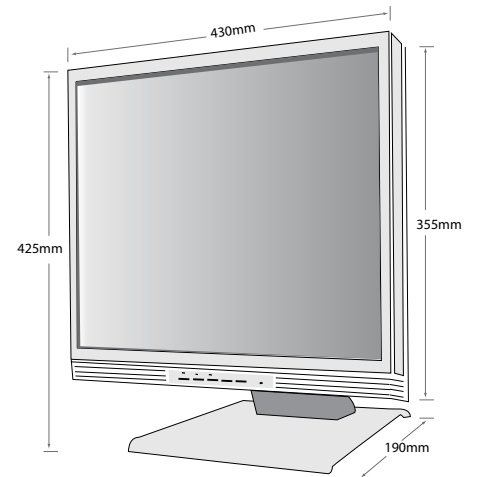


LT Series CCTV LCD Monitors

The professional quality LT Series of LCD monitors are specifically designed for CCTV applications and come with 2 BNC outputs and 2 BNC inputs, VGA, 2 RCA, HDMI and PC Audio inputs. Display modes include Video 1, Video 2, PC and HDMI. The multi language OSD controls include Picture Mode, Contrast, Brightness, Colour Tint, Sharpness, Colour Temperature and DNR.

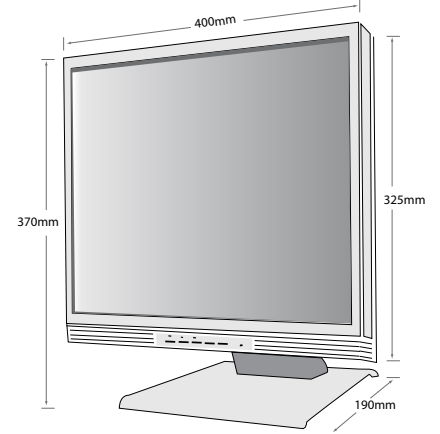

IMC-15LT 15" Monitor
IMC-17LT 17" Monitor
IMC-19LT 19" Monitor

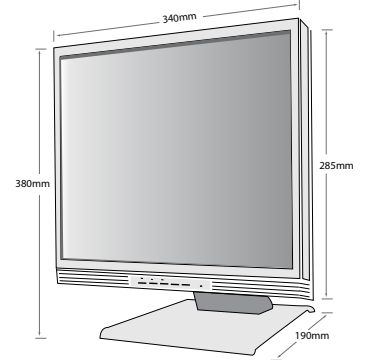

© i-LAX ELECTRONICS INC. 2009
Specifications are subject to change without notice.
Weights and dimensions may be indicative.
Revised January 2009

Model	IMC-15LT	IMC-17LT	IMC-19LT
Diagonal Size (inches)	15	17"	19"
Active Area (mm)	304.1 (H) x 228.1 (V)	337.9 (H) x 270.3 (V)	376.3 (H) x 301.1 (V)
Display Resolution	1024 x 768	1280 x 1024	1280 x 1024
Dot Pitch	0.297 x 0.297	0.264 x 0.264	0.294 x 0.294
Brightness	260 cd/m ²	300 cd/m ²	300 cd/m ²
Response Time (Tr/Tf)	8 ms	5 ms	5 ms
Contrast Ratio	700:1	800:1	800:1
System	PAL / NTSC		
Display Mode	Video 1/ Video 2/ PC/ HDMI		
Viewing Angle	Vertical -80°~80° Horizontal -80°~80°		
Colour Depth	8-bit, 16,77,216 colours		
Horizontal Frequency	31kHz ~ 65kHz		
Vertical Frequency	56Hz ~ 75Hz		
Composite Output	(BNC) x 2		
Composite Input	(BNC) x 2, (VGA) x 1, (RCA) x 2 (PC Audio) x 1, (HDMI) x 1		
Output Video	2 BNC connectors for Video loop-through		
Display Mode	Video 1/ Video 2/ PC/ HDMI		
Speaker	2.5W x 2		
OSD Control	Picture Mode, Contrast, Brightness, Colour, Tint, Sharpness, Colour Temp, DNR		
OSD Languages	English, German, French, Italian, Spanish, Russian, Turkish, Japanese, Polish		
Auto Adjustment	Yes		
De-interlace	Yes		
Wall Mount	Yes		
Tilt	-5°~15°C		
Monitor MTBF	50,000 hours		
LCD Lamp	25,000 hours		
Monitor Scan	Microprocessor controlled		
VESA Specifications	DPMS, DDC1/2B		
AC Power	AC 100 ~ 240v, 50/60Hz		
Power Consumption	35W Max. in "ON" Mode, Under 3W in Power Saving Mode (100 Vac), Under 5W in Power Saving Mode (240 Vac)		
Safety	UL/CUL, FCC-DOC, CE, ROHS		
Temperature	Operation: 5°~40°C - Storage: -25°~60°C		
Humidity	10% ~ 90%		
Weight	3.0 Kg (6.6 lbs)	5.8 Kg (12.8 lbs)	6.0 Kg (13.2 lbs)